


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

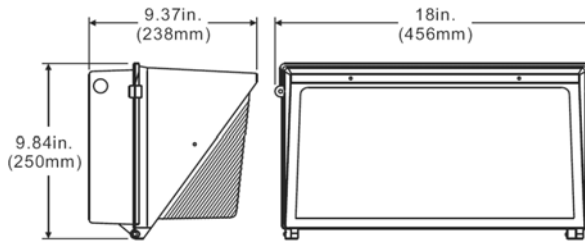

ORDERING

Die cast aluminum housing with integral hinging feature for ease of maintenance. Borosilicate prismatic glass optically designed for optimum light distribution. Optional polycarbonate shield or wire guard for vandalproof protection is available. Textured anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. Threaded apertures for conduit and optional photocell provided for flexibility during installation. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit. Sizing is ideal for lamping of 100w to 250w metal halide or high-pressure sodium.

HOUSING

Rugged die cast aluminum housing.

ELECTRICAL

For Fluorescent: Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

For HID: Ballast is pre-wired, CWA HPF, core and coil with dry film capacitor and starter (if required).

SHIELDING

Borosilicate glass is standard.

FINISH

Baked on premium architectural bronze for maximum durability.

CERTIFICATION

All units bear UL label. Made in U.S.A. ARRA compliant.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
WBB	100	PSMH-Pulse	120
	150	Start Metal	277
	250	Halide	480
		HPS-High Pressure Sodium	MULTI
	42	CF-Compact Fluorescent	120
			277
			UNV
	70	IND-Induction	UNV
	80		
	100		

OPTIONS:

- PC** – Photocell
- VS** – Vandal Shield
- TP** – Tamperproof hardware
- GLR** – Fusing
- QZ** – Quartz Restrike
- WG** – Wire Guard
- CC** – Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: