


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

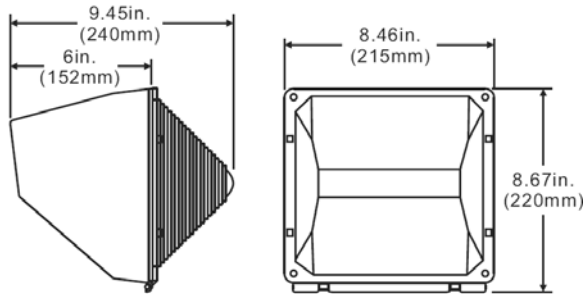

ORDERING

Die cast aluminum housing with integral hinging feature for ease of maintenance. Borosilicate prismatic glass optically designed for optimum light distribution. Optional polycarbonate shield for vandalproof protection over the glass refractor. Textured anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. Threaded apertures for surface conduit and optional photocell. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit conditions. Optional tamperproof hardware.

HOUSING

Rugged die cast aluminum housing.

ELECTRICAL

For metal halide lamping, ballast is high power factor, constant wattage auto transformer. Electrical components are mounted to cast aluminum housing for optimum heat dissipation. For high-pressure sodium, ballast is normal power factor reactor type for 120V. High power factor, multi-tap, and most fixed voltages available.

SHIELDING

Borosilicate glass is standard.

FINISH

Baked on premium architectural bronze for maximum durability.

CERTIFICATION

All units bear UL and Made in U.S.A. labels, UL listed for wet locations.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
AWB	50	PSMH-	120
	70	Pulse Start	277
	100	Metal Halide	480 MULTI
	35	HPS-	
	50	High	
	70	Pressure	
	100	Sodium	
	150		
	42	CF-	UNV
		Compact	
		Fluorescent	

OPTIONS:

- EM** – 90 Min. Remote Battery Back-Up (For Compact Fluorescent Only)
- TP** – Tamperproof Hardware
- PC** – Photocell
- WG** – Wire Guard
- GLR** – Fusing
- QZ** – Quartz Restrike
- GS** – Glare Shield (Visor)
- VS** – Vandal Shield
- PSMH** – Pulse Start Metal Halide
- HPS** – High Pressure Sodium
- CF** – Compact Fluorescent
- CC** – Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: