


**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

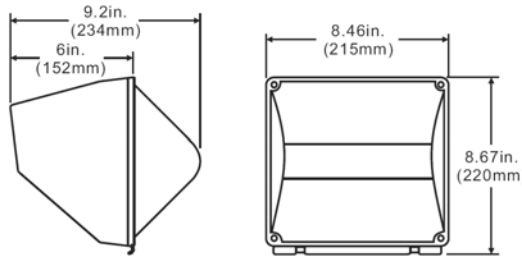

**ORDERING**

High impact polycarbonate lens is designed for optimum light distribution. Optional wire guard is available upon request. Textured anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. 1/2" threaded apertures for surface conduit and/or optional photocell are provided for convenience during installation. All units are fully gasketed. For wall mounting directly over standard 4" outlet box or with surface conduit. Optional tamperproof hardware is available.

**HOUSING**

Rugged die cast aluminum housing.

**ELECTRICAL**

For metal halide lamping, ballast is high power factor, constant wattage auto aluminum housing for optimum heat dissipation. For high pressure sodium, ballast is normal power factor reactor type for 120V. High power factor, multi-tap, and most fixed voltages available.

**SHIELDING**

High impact polycarbonate lens standard.

**FINISH**

Baked on premium architectural bronze for maximum durability.

**CERTIFICATION**

All units bear UL label. Made in U.S.A. UL Listed for wet location.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
EWB	70	PSMH- Pulse Start Metal Halide	120
			277
			480
			MULTI
	70	HPS- High Pressure Sodium	UNV
	26	CF- Compact Fluorescent	
	32		
	42		

**OPTIONS:**

- EM** – 90 Min. Remote Battery Back-Up (For Compact Fluorescent Only)
- PC** – Photocell
- WG** – Wire Guard
- TP** – Tamperproof hardware
- GLR** – Fusing
- QZ** – Quartz Restrike
- CC** – Custom Color

JOB NAME:
FIXTURE TYPE:
MODEL NO:

