


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

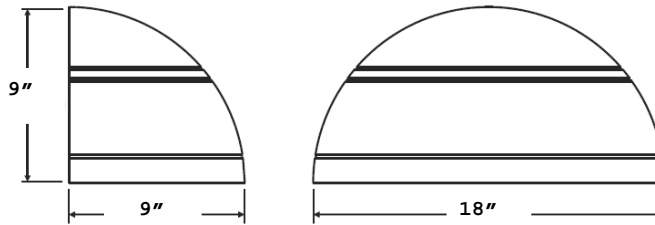

ORDERING

Ideal for parking areas, entrances, walkways, underpasses, loading docks, recreation areas, and tunnels. Heavy-duty die-cast aluminum construction. Heat and impact resistant tempered glass lenses. Powder coated finish on cast aluminum housing. One piece designed anodized aluminum reflector for optimum light efficiency. Silicon rubber seal prevents leakage. Standard wide throw reflector. Available as downlight only. Lamping up to 150W PSMH or 150W HPS and compact fluorescent 2-42W available.

HOUSING

Heavy-duty die cast aluminum housing.

ELECTRICAL

Optimized for 150W PSMH and 150W HPS. Standard with 120V, 277V, or Multi-tap ballast. High Power Factor and other voltages/lamp options are also available.

FINISH

Powder coated architectural bronze is standard. Other finishes are available upon request.

CERTIFICATION

All units bear UL label. Listed for wet location. Made in U.S.A.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
CWPD	70	PSMH-	120
	100	Pulse Start	277
	150	Metal Halide	480
			MULTI
	100	HPS-	
	150	High Pressure Sodium	
	70	IND-	
		Induction	
	(1 or 2) 26	CF- Compact	120
	(1 or 2) 32	Fluorescent	277
	(1 or 2) 42		UNV

OPTIONS:

- PC** – Photocell
- VS** – Vandal Shield
- TP** – Tamperproof hardware
- GLR** – Fusing
- QZ** – Quartz Restrike
- SMB** – Surface Mounted Back Box
- FTR** – Forward Throw Reflector
- CC** – Custom Color

JOB NAME:
FIXTURE TYPE:
MODEL NO:

