


1. Recessed

Recessed Wide Center Basket

D/I-CID



DIMENSIONS

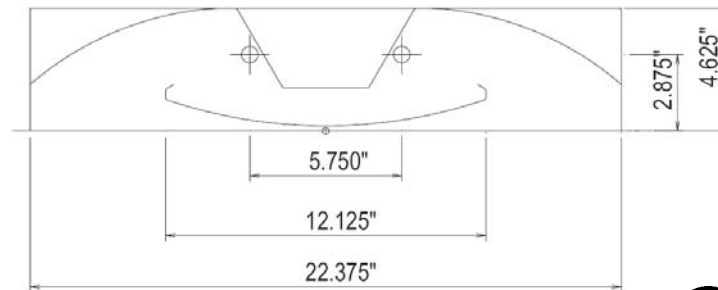

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Provides indirect, soft, uniform illumination. Curved perforated details combine recessed fixture advantages with efficient indirect shielding. Perforated center basket, backed with reflective white acrylic, controls glare and veiling reflections. Shielding is easily removed for relamping. Optional Side Lenses improve visual comfort and prevent dust from entering the lamp chamber. Flanged fixture available for plaster ceilings.

HOUSING

Die formed 20 gauge steel housing unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Perforated diffuser element with matte white acrylic overlay.

FINISH

All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.

CERTIFICATION

All units bear UL Label. Made in U.S.A. Suitable for damp locations. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
D/I-22CID (2x2 unit)	1	17T8	120
	2	14T5	277
	3	40BX	UNV
		50BX 24T5HO	
D/I-24CID (2x4 unit)	1	32T8	
	2	28T5	
	3	54T5HO	

OPTIONS:

- EM** - Emergency
- DM** - Dimming (Specify Type)
- M** - Flanged Unit
- 20G** - 20 Gauge Housing
- 2CKT** - Two-circuit wiring
- DC** - Dust Cover



JOB NAME:
FIXTURE TYPE:
MODEL NO: