



# 1. Recessed

# Shallow Cross Blade Basket

# D6

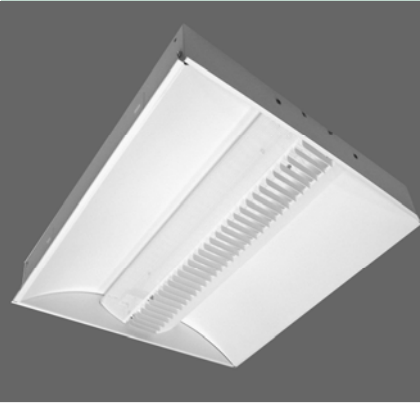

## DIMENSIONS

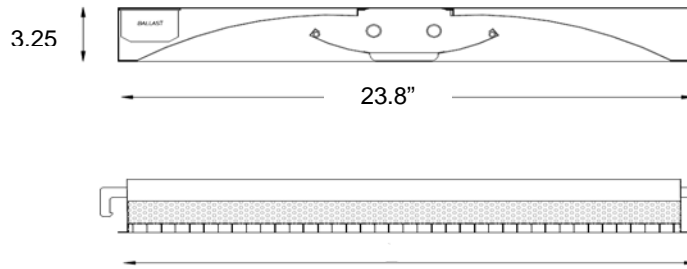

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Provides direct/indirect, soft, uniform illumination. Extremely efficient fixture allows for the reduction in the amount of fixtures used in a space. Shielding is easily removed for re-lamping. No tools required to access ballast compartment. Designed specifically for T5 & T5HO lamping technology.

### HOUSING

Die formed heavy gauge steel housing unitized into one piece.

### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

### SHIELDING

White perforated diffuser with opal inlays and white cross baffle.

### FINISH

All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.

### CERTIFICATION


All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

## ORDERING

MODEL	SIZE	LAMP QTY	WATTAGE/TYPE	VOLTAGE
D6	1-	1	28T5	120
	1x4 unit	2	54T5HO	277
		3		UNV
2-	2x2 unit	1	14T5	
		2	24T5HO	
		3		
2-	2x4 unit	1	BIAX40	
		2	28T5	
		3	54T5HO	

### OPTIONS:

- EM – Emergency
- DM - Dimming (Specify Type)
- Prefix MD6 – Flanged Unit
- GLR – Fused
- HR – Heat Removal

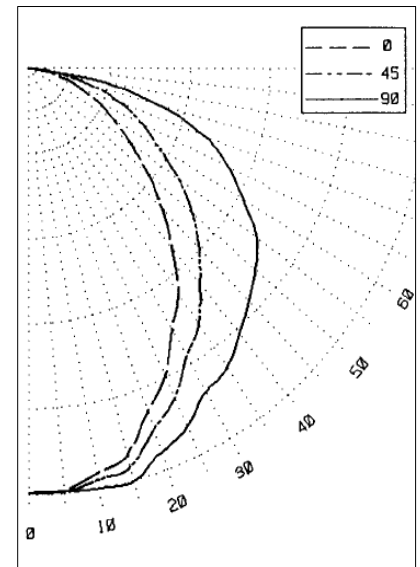

JOB NAME:
FIXTURE TYPE:
MODEL NO: