


1. Recessed

High Efficiency Grid Direct T5

D2



DIMENSIONS

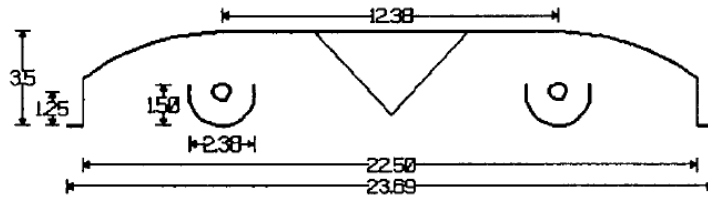

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Provides direct/indirect, soft, uniform illumination. Fixture comes standard with opal lenses. Clear lenses available. Extremely efficient fixture allows for the reduction in the amount of fixtures used in a space. Shielding is easily removed for re-lamping. No tools required to access ballast compartment. Designed specifically for T5 & T5HO lamping technology.

ORDERING

HOUSING

Die formed heavy gauge steel housing unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Diffuser is opal white acrylic.

FINISH

All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.


CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

MODEL	SIZE	LAMP QTY	WATTAGE/TYPE	VOLTAGE
D2	1- 1x4 unit	1	28T5 54T5HO	120 277 UNV
	2- 2x2 unit	2	14T5 24T5HO	
	2- 2x4 unit	2	28T5 54T5HO	

OPTIONS:

- Prefix MD2 – Flanged Unit
- EM - Emergency
- DM - Dimming (Specify Type)
- GLR – Fused
- CLR – Clear Lenses

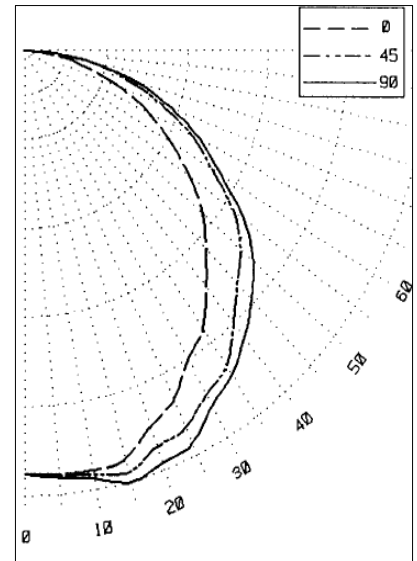

JOB NAME:
FIXTURE TYPE:
MODEL NO: