


1. Recessed

Premium Recessed Troffer

PT



DIMENSIONS

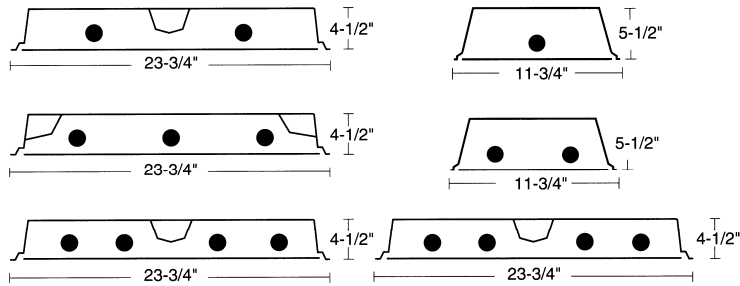

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Deep premium grade fixture available in 1x2, 1x4, 2x2, and 2x4 sizes in 1, 2, 3, 4, and 6 lamp configurations, in T5, T8, and BIAx. Flush steel precision mitered doorframe for PT series. Glare dampening ribbed regressed aluminum frame for PRT Series. Doorframe hinges from either side and is secured by rotary cam latches. Optional locking screws for impact areas. Fully gasketed for light tight fit. For mounting in exposed T-Bar (grid) ceilings. Optional flanged construction for various other ceiling types. Suitable for through wiring. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

100% virgin acrylic prismatic is standard. Consult option sheet for other shielding.

FINISH

All metal parts are phosphate coated and painted after fabrication with baked white enamel electrostatically applied providing a durable finish with a minimum 89% reflectance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

MODEL	SIZE	LAMP QTY	WATTAGE/TYPE	VOLTAGE
PT	1 -	1	17T8	120
	1x2 unit	2	14T5 24T5HO	277 UNV
1 -	1x4 unit	1	32T8	
		2	28T5	
		3	54T5HO	
2 -	2x2 unit	2-32U		
		3-31 U (1-5/8)		
		(2 or 3) 40BX		
		(2, 3, or 4) 14T8		
		(2, 3, or 4) 17T8		
2 -	2x4 unit	(2, 3, or 4) 54T5HO		
		(2, 3, 4, or 6) 32T8		
		(2, 3, 4, or 6) 28T5		

OPTIONS:

Change prefix PT to PRT – Regressed Aluminum Door

Add M to prefix (MPRT/MPT) – Flange

GSK –Gasketed Door Frame

125A –.125" Thick Lens (P12)

156A –.156" Thick Lens (P12)

187A –.187" Thick Lens (P12)

SA95 – High Efficiency Specular Reflector

SA87 – Specular Reflector

WH92 – High Efficiency White Reflector

CTS – Captive Thumb Screws

TP – Tamper Proof Screws



JOB NAME:
FIXTURE TYPE:
MODEL NO: