


1. Recessed

Premium 4x4 Recessed Square

RS



DIMENSIONS

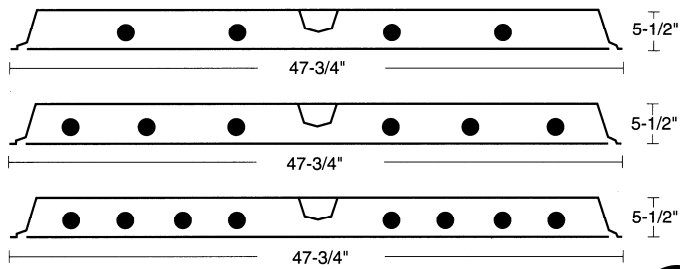

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Premium 4x4 fixture, available in 4, 6, and 8 lamp configurations in T8, T5 and T5HO. Provides a broad spread of even illumination over a wide area. Maximum lamp to shielding spacing in a deep housing provides uniform illumination without lamp images. Available with either flush steel door frame or regressed aluminum frame with glare dampening ribs in one 4x4 frame or in two 2x4 sections with center mullion. Fully gasketed for tight light fit. Pressure lock lampholder. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

ORDERING

MODEL	LAMP QTY	WATTAGE/TYPE	VOLTAGE
RS	4	32T8	120
	6	54T5HO	277
	8	28T5	UNV

HOUSING

Die formed heavy gauge welded steel housing for maximum strength and rigidity.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

100% virgin acrylic prismatic is standard. Consult option sheet for other shielding.

FINISH

All metal parts are phosphate coated and painted after fabrication with baked white enamel electrostatically applied providing a durable finish with a minimum 89% reflectance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

OPTIONS:

- EM - Emergency
- DM - Dimming (Specify Type)
- M - Flanged Unit
- 2PD - Two Piece (2-2x4) Door
- RA - Regressed Aluminum Door with Dampening Ribs
- SA95 - High Efficiency Specular Reflector
- SA87 - Specular Reflector
- WH92 - High Efficiency White Reflector

JOB NAME:
FIXTURE TYPE:
MODEL NO:

