


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

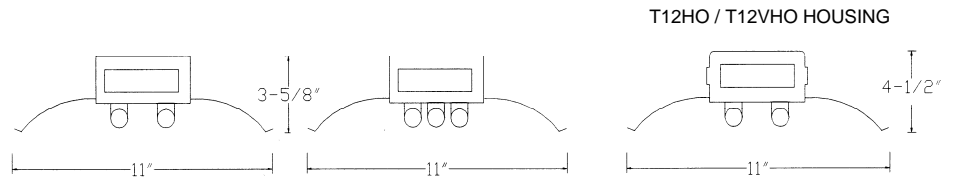

ORDERING

Available in 2', 3', 4', 8', and 16' lengths, 1, 2, and 3 lamp configurations, T5, T8, T5HO, T12HO, & T12VHO. 4' transverse ribbed reflector for maximum rigidity. Snap on end plate can double as a coupler for continuous row installation. For individual or continuous row mounting. Reflector aligners are supplied with 8' units. Optional half reflector available for asymmetrical applications. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel with knockouts for stems or chain hangers.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All metal parts pre-painted with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Damp location label optional. ARRA and BAA compliant.

MODEL	LAMP QTY	WATTAGE/TYPE	MOUNTING	VOLTAGE
391 2' unit	1	17T8	AC – Aircraft Cable (48" Standard) ST – Stem (24" Standard) CK24 – 24"Chain Kit SM – Surface Mount (No hardware supplied.)	120
	2	14T5		277
	3	24T5HO		UNV
3' unit	1	25T8		
	2	21T5		
	3	39T5HO		
4' unit	1	32T8		
	2	39T5		
	3	54T5HO		
8' unit	1	60T12HO		
	2	110T12VHO		
	2	32T8-8TD		
	4	28T5-8TD		
	6	54T5HO-8TD		
	4	96T12VHO		

OPTIONS:

- EM – Emergency
- DM – Dimming
- WG – Wire Guard
- AR – Asymmetric Reflector
- 10% – 10% Aperture Reflector
- PERF – Perforated Reflector
- SA95 – High Efficiency Specular Reflector
- SA87 – Specular Reflector
- WH92 – High Efficiency White Reflector



JOB NAME:
FIXTURE TYPE:
MODEL NO: