



**DIMENSIONS**

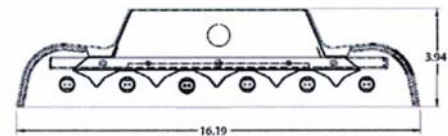

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

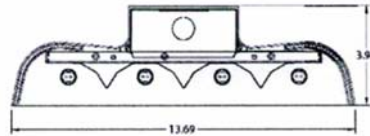

**ORDERING**

For energy efficient replacement of Metal Halide and High Pressure Sodium Fixtures. Available in T8, T5, T5HO, 4 lamp and 6 lamp configurations. Side acrylic reflectors provide uplight and eliminate the "cavern" look for other fluorescent high bays. Ideal for factories and warehouses where high levels of illumination are required. Miro-4 reflector maximizes light output while offering high efficiency. White reflector also available for low bay applications. Pendant mounting (for chain or cable) standard. Optional provisions for dimming/Hi-LO controllable systems for additional energy savings.

**HOUSING**

Cold Rolled Steel body with injection molded ABS end caps. Finished in baked white enamel.

**ELECTRICAL**

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

**REFLECTOR**

Miro-4 reflector designed specifically for lamp quantity chosen (4 or 6). White reflector also available.

**CERTIFICATION**

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
<b>AFLHB</b>	4	32T8	<b>AC</b> – Aircraft	120
	6	28T5	Cable (48" Standard)	277
		54T5HO	<b>ST</b> – Stem (24" Standard)	UNV
			<b>CK</b> – 24" Chain Kit	
			<b>SM</b> – Surface Mount (No Hardware Supplied)	
			<b>HB60Y</b> – 60" Cable Kit with Gripple Type Adjustment	

**OPTIONS:**

- EM** - Emergency
- DM** - Dimming
- BL** - Bi-Level Switching
- WG** - Wire Guard
- ALNS** - 1/8" Acrylic Lens
- PLNS** - Prismatic Lens
- CP** - Twist Lock Cord & Plug
- CK** – Chain Kit
- SB** – Anchor for Seismic Wiring
- OCC** – Occupancy Sensor



JOB NAME:
FIXTURE TYPE:
MODEL NO: