



DIMENSIONS

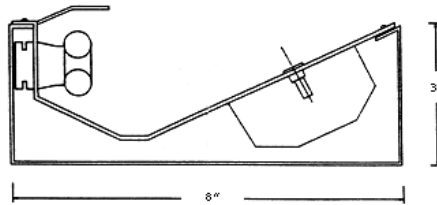

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in 2' and 4' sections, BIAx (shown above) and T8, T5 & T5-HO straight lamp configurations. Provides shadow free energy efficient indirect cove lighting. Reflector specially angled to direct light towards the ceiling to provide low, uniform lighting. Standard reflector is baked white enamel. Optional semi-specular aluminum.

HOUSING

Die formed 20 gauge steel housing.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

Finished with premium grade baked white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
LLG	1	T8	120
	2	T5	277
		T5HO	UNV
2' unit	1	TT5 BIAx	
4' unit	1	T8	
	2	T5	
		T5HO	
	2	TT5 BIAx	
	4		

OPTIONS:

- EM** - Emergency
- DM** - Dimming (Specify Type)
- SA95** -Energy Efficient Specular Reflector

JOB NAME:
FIXTURE TYPE:
MODEL NO:

