


DIMENSIONS



(8 lamp unit = 26.06" width)

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

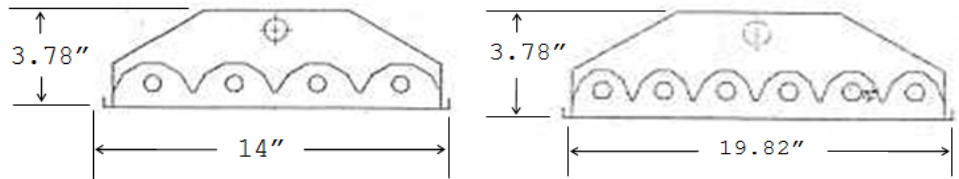

ORDERING

Available in T-8, T-5, T-5 HO, in 3, 4, 6 or 8 lamp configuration. Also available in 10 lamp T8 or T5HO. Ideal for factories and warehouses where high levels of illumination are required. Enhanced aluminum reflector maximizes light output while offering high efficiency. Pendant mounting (for chain or cable) standard. Optional quick connect hook with 24" cord and NEMA twist plug for chain hanging. Unit comes standard with open bottom. Available with framed wire guard and/or clear or prismatic lens for areas that require lamp protection. Optional mono-point hub/splice box for simplified HID replacements. Optional provisions for dimming/Hi-LO controllable systems for additional energy savings. Consult factory.

HOUSING

Die formed heavy gauge steel with knockouts for stems or chain hangers.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise. All T5HO units come standard with 90C rated ballasts.


FINISH

All metal parts pre-painted with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance. Post painted units finished in gloss white powder coat.

CERTIFICATION

All units bear UL label. Made in U.S.A. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
FLHB	3	32T8	120
	4	28T5	277
	6	54T5HO	UNV
	8		
	10		
	12		

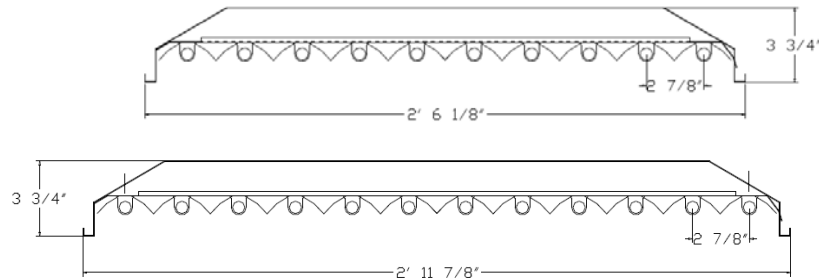

OPTIONS:

- EM** -Emergency
- DM** -Dimming (Specify type)
- 2CK** - 2 Circuit Wiring
- WG** - Wire Guard
- PL** - Prismatic Lens
- AL** - Clear Acrylic Lens
- CP** - 6' Cord & Plug (Specify type/voltage)
- SC** - Safety Chain
- GSKT** - Gasketed Door Frame
- ALUM** - 22 Gauge Aluminum Housing
- PP** - Post Painted
- SPMH** - Single Point Mounting Hub
- UPLIGHT** - Uplight Slots
- OC** - Occupancy Sensor (end mounted)
- INDIRECT**- Housing for indirect installation
- CK24** - Chain Kit with V hooks (2' length is standard)
- HB60Y** - 60" Cable Kit with Gripple Type Adjustment

Total Fixture Efficiencies:
454T5HO = 98.7%
654T5HO = 94.7%
432T8-HI = 93.8%
632T8-HI = 97.2%
832T8-HI = 92.2%



JOB NAME:
FIXTURE TYPE:
MODEL NO: