


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

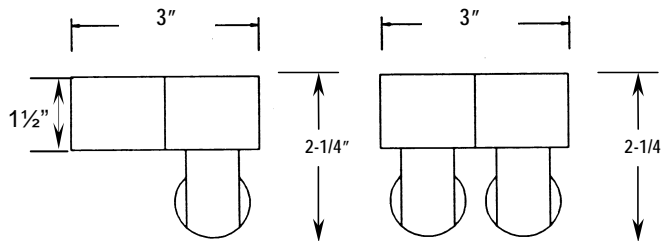

ORDERING

Available in T8, T5 and T5 HO 1 and 2 lamp configurations. Ideal for cove or cornice lighting where uniform, uninterrupted illumination is necessary. 3" lamp stagger eliminates dark spots caused by back to back sockets on standard strips. Optional side mount lamps where space is extremely limited. For surface or pendant mounting, individually or in continuous row. Optional symmetrical, asymmetrical, and light shield reflectors available.

HOUSING

Die formed heavy gauge steel welded for maximum strength.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All metal parts post-painted with premium grade white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

MODEL MSG	LAMP QTY	WATTAGE/TYPE	VOLTAGE
	1	14T5 (22-7/16")	120
		17T8 (24")	277
		21T5 (34-9/32")	UNV
		25T8 (36")	
		28T5 (46-1/16")	
		32T8 (48")	
		28T5-TD (92-1/8")	
		32T8-TD (96")	
	2	14T5 (25-7/16")	
		17T8 (27")	
		21T5 (37-9/32")	
		25T8 (39")	
		28T5 (49-1/16")	
		32T8 (51")	
		28T5-TD (95-1/8")	
		32T8-TD (99")	

OPTIONS:

- EM - Emergency
- DM - Dimming
- LS - Light Shield Reflector
- SR - Symmetric Reflector
- AR - Asymmetric Reflector



JOB NAME:
FIXTURE TYPE:
MODEL NO: