



## 2. Surface

# Self Contained Emergency Light

# ANG

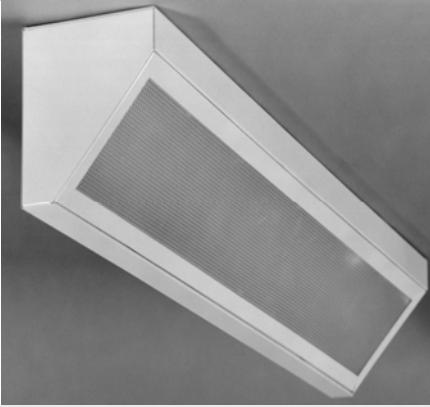

### DIMENSIONS

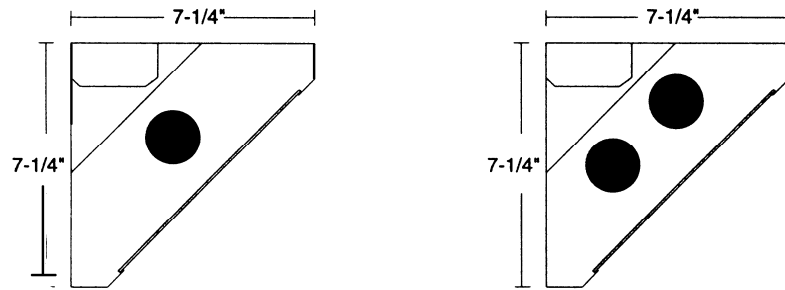

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



### ORDERING

Unique corner mount design for direct downward and outward illumination. Same unit can also be used as cove lighting for indirect upward and outward illumination. Available in 2', 3', and 4' lengths, in 1, and 2 lamp configurations, T5, T5HO and T8. For individual or row mounting. Available in custom finishes to match most décor's. Available with energy efficient reflectors in High Efficiency Aluminum (95% reflectance), Specular Aluminum (87% reflective) and High Efficiency White (92% reflectance.)

#### HOUSING

Die formed heavy gauge steel housing and ends unitized into one piece.

#### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

#### SHIELDING

Acrylic prismatic lens is standard.

#### FINISH

All metal parts are painted after fabrication with premium white enamel with a minimum of 89% reflectance applied over ion phosphate pretreatment for maximum adhesion and rust resistance.

#### CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

**MODEL**  
**ANG**

**LAMP QTY**  
1  
2

**WATTAGE/TYPE**  
17T8  
32T8  
25T8  
14T5  
21T5  
28T5  
24T5HO  
39T5HO  
54T5HO

**VOLTAGE**  
120  
277  
UNV

### OPTIONS

- EM** – Emergency
- TP** – Tamperproof Hardware
- TSD** – Tamperproof Screwdriver
- LEX** – 1/8" Thick Polycarbonate Lens
- SA95** – High Efficiency Specular Aluminum Reflector
- SA87** – Specular Aluminum Reflector
- WH92** – High Efficiency White Reflector
- WCB** – White Cross Baffle

JOB NAME:
FIXTURE TYPE:
MODEL NO:

