




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

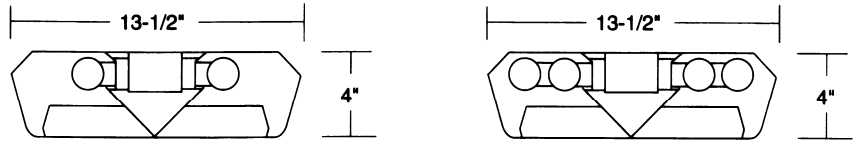

ORDERING

Available in 2' and 4' lengths, in 2 and 4 lamp configurations, T8, T5, T5-HO. Solid metal sides are standard. Optional luminous sides available. Designed for pendant mounting direct-indirect applications. Optional closed top units for direct downlight or flush surface mounting. Deep V center provides virtually glare free distribution making this the long time standard for classroom and other institutional applications. Louver hinges from either side for ease of maintenance.

HOUSING

Die formed 20 gauge cold rolled steel welded into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

LOUVER

Die formed louver is standard with 25°x35° shielding. Optional is 35°x45° louver.

FINISH

All metal parts painted after fabrication with high gloss white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Suitable For damp location. Made in U.S.A. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY & WATTAGE TYPE</u>	<u>VOLTAGE</u>
NC	(2 or 4)	17T8
	(2 or 4)	32T8
	(2 or 4)	14T5
	(2 or 4)	28T5
	(2 or 4)	24T5HO
	(2 or 4)	54T5HO
		120
		277
		UNV

OPTIONS:

- EM - Emergency
- DM - Dimming
- LS – Luminous Sides
- CT – Closed top
- 35°x45° – 35°x45° Louver



JOB NAME:
FIXTURE TYPE:
MODEL NO: