



2. Surface

Surface Direct/Indirect Center Basket

SD/I-C



DIMENSIONS

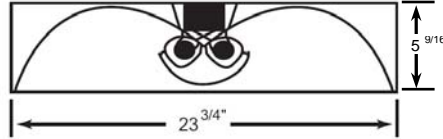

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Provides indirect, soft, uniform illumination. Curved perforated details with efficient indirect shielding. Perforated center basket, backed with reflective white acrylic, control glare and veiling reflections. Shielding is easily removed for relamping. Available in array of custom colors.

HOUSING

Die formed 20 gauge steel housing unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Perforated diffuser element with matte white acrylic overlay.

FINISH

All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp locations. ARRA and BAA compliant.

<u>MODEL</u>	<u>SIZE</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
SD/I-C	14- 1x4 unit	1	32T8	120
		2	28T5 54T5HO	277 UNV
		2	40BX	
22-	2x2 unit	1	40BX	
		2	50BX	
		3	55BX 17T8 14T5 54T5HO	
		3	54T5HO	
24-	2x4 unit	2	32T8	
		3	28T5	
		4	54T5HO 40BX 50BX 55BX	
		4	54T5HO	

OPTIONS:

- EM** - Emergency
- DM** - Dimming (Specify Type)
- 2CKT** - Two-Circuit Wiring

JOB NAME:

FIXTURE TYPE:

MODEL NO:

