



2. Surface

Surface Mount Deep Cell Parabolic

SPBL

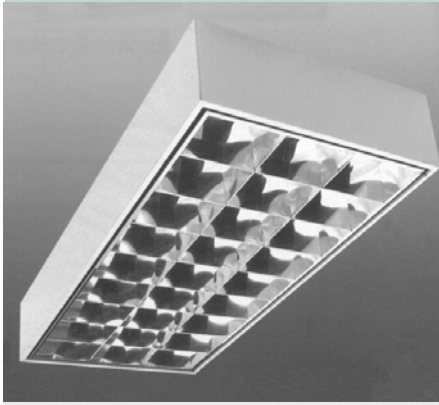

DIMENSIONS

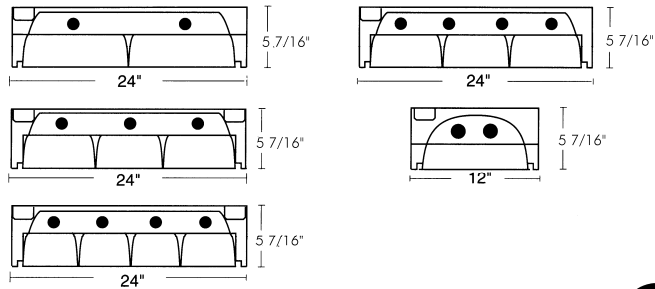

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Available in 1x4, 2x2, and 2x4 lengths, 1, 2, 3, and 4 lamp configurations, T8, T12, and BIAx. Available in all standard cell configurations. 3" deep cell parabolic louver provides optimum performance and efficiency while ensuring a high level of visual comfort. Semi-specular natural anodized aluminum louver is virtually maintenance free. Louvers hinge from either side and are secured in either the open or the closed position by die formed steel hinges, Mechanical light trap prevents light leaks. Proper lamp positions allow fixture to operate at maximum efficiency with controlled widespread distribution. For individual or continuous row mounting. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed 20 gauge rust inhibited cold rolled steel.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

LOUVER

Anodized aluminum louver, precision mitered. Standard finish is semi-specular silver. Optional specular silver finish is available.

FINISH

All parts painted after fabrication with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance. Regressed slots are matte black.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp locations. ARRA and BAA compliant.

ORDERING

MODEL	SIZE	LAMP QTY	WATTAGE/TYPE	CELLS	VOLTAGE
SPBL	1- 1x4 unit	1	28T5	8	120
		2	54T5HO 32T8	9	277 UNV
	2- 2x2 unit	2	40BX	9	16
		3			
		1	32U6T8		
	2- 2x4 unit	2	31U1.5T8	12	
		3			
		4			28T5 54T5HO 32T8

OPTIONS:

- EM - Emergency
- DM - Dimming (Specify Type)
- LOL- Acrylic Louver Overlay
- SPEC - Specular Finish Louver
- SA95 - High Efficiency Specular Reflector
- SA87 - Specular Reflector
- SWA - Smooth White Acrylic
- 2CKT- 2 Circuit Wiring



JOB NAME:
FIXTURE TYPE:
MODEL NO: