


## 2. Surface

## Slim 2" x 4" Linear Pendant

# P24

### DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.



The P24 is available in 2', 4', and 8' lengths, in T5 and T5HO lamp configurations only. 2" x 4" narrow design is architecturally preferred for installation in corridors, lobbies, and office areas. Direct down light is standard. Indirect and direct/indirect applications are available as options. Individual and continuous rows are available for both surface and pendant mounting. Alignment brackets are available for continuous row installation. Ends seams are fitted to provide the appearance of continuous smooth channel. Knockouts on channel ends allow for through wiring or end feed.

#### HOUSING

Die formed welded heavy gauge cold rolled steel. Direct/Indirect fixtures provide approximately 10% uplight.

#### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

#### SHIELDING

Acrylic prismatic lens is standard. Clear or opal lens is optional. Cross baffle is available for downlight only.

#### FINISH

All metal parts post painted with premium grade white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

#### CERTIFICATION


All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

### ORDERING

<u>MODEL</u> P24	<u>LAMP QTY</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
2' unit	1	14T5 24T5HO	AC – Aircraft Cable	120 277 UNV
4' unit	1	28T5 54T5HO	SM – Surface Mounted	
8' unit	1	28T5-8TD 54T5HO-8TD	WM – Wall Mounted	

#### OPTIONS:

- EM – Emergency Battery Pack
- DM – Dimming Ballast (Specify Type)
- D/I – Direct/Indirect
- CB – Cross Baffle (Downlight Only)
- CL – Clear Lens
- PL – Prismatic Lens
- OL – Opal Lens
- CC – Custom Color (Specify Color)

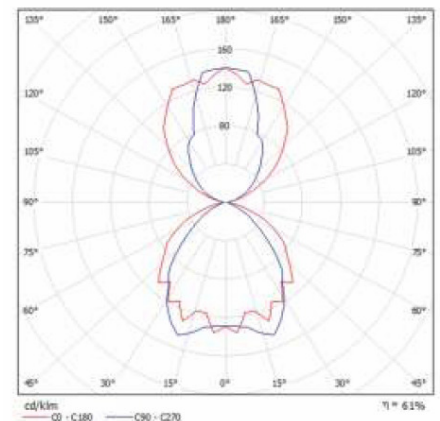

JOB NAME:

FIXTURE TYPE:

MODEL NO:

