




**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

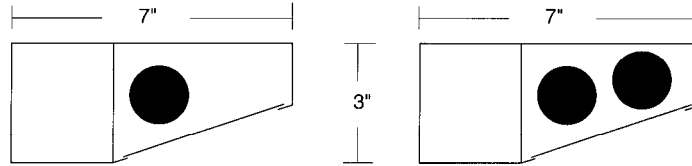

**ORDERING**

Available in 2', 3', and 4' lengths in 1 and 2 lamp configurations in T8 only. Versatile unit, can be wall mounted with or without optional uplite component for task lighting or can be under cabinet or corner mounted. Optional switch, convenience outlet, and cord and plug assembly to meet any requirements. For individual and continuous row mounting.

**HOUSING**

Heavy gauge die formed steel housing and end plates.

**ELECTRICAL**

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

**SHIELDING**

Clear Linear Prismatic snap-in diffuser for glare free illumination.

**FINISH**

All parts finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

**CERTIFICATION**


All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>
25	1	17T8	120
	2	25T8	277
		32T8	UNV

**OPTIONS:**

- EM** - Emergency
- DM** - Dimming
- SW** - Turn Switch
- CO** - Convenience Outlet
- UP** - Uplite Component
- CP** - Cord & Plug

**25 SERIES WITH UPLITE COMPONENT**

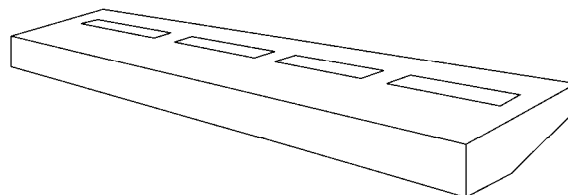

JOB NAME:
FIXTURE TYPE:
MODEL NO:

