




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

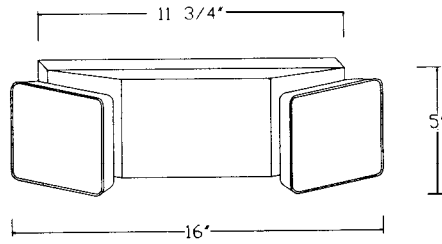

ORDERING

MODEL
AA - 2 2-RECT PAR 36

Units are compact. Ideal for public, commercial, and industrial facilities with varied unit load requirements. Plastic incandescent heads standard. Metal or weatherproof heads available as options. Automatic temperature compensated pulse type charger. High capacity automatic instantaneous transfer relay in a dust tight enclosure. Low voltage disconnect prevents over-discharge of battery. Automatic brownout protection is standard. Test switch and indicator pilot light are standard. Available with 3 wire cord and plug assembly. Wire guard is optional

HOUSING

High impact injection molded thermoplastic, scratch and corrosion resistant. Optional 20 gauge die formed steel housings.

BATTERY

Standard 6 volt, maintenance free, seal lead calcium ballast for 120V/277V system. Optional with remote capabilities

FINISH

Architectural mist white.

LAMPS

Par 36 5.4 watt high intensity tungsten lamps are standard.

CERTIFICATION

All units bear UL label and Made in the U.S.A. labels. Meets or exceed NEC, OSHA, NFPA, and most state and local codes.

ADDITIONAL OPTIONS:

- REM** – Remote Capability
- CP** – Cord and Plug Assembly (specify voltage)
- WG** – Wireguard



JOB NAME:
FIXTURE TYPE:
MODEL NO: