


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

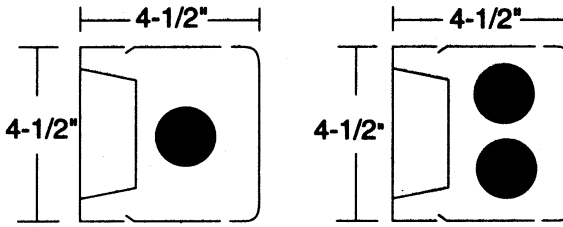

ORDERING

Available in 2', 3', and 4' lengths in 1, 2, 3, and 4 lamp configurations in T8 only. Versatile units can be used as vanity wall bracket. With lamp divider and switching can be used as a hospital bed light. For full complement of options to fill any wall mount requirement, see Options. Directs light up and down, thereby eliminating glare. Optional top baffle for downlighting only. Optional tamperproof end for added security. Optional switching -single circuit, double circuit and 4 way switching. Optional convenience outlet. Optional nite-lite with or without switch.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>
16	1	17T8	120
	2	25T8	277
	3*	32T8	UNV
	4		

OPTIONS:

HOUSING

Die formed heavy gauge steel. End plates heavy gauge steel.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Clear acrylic with linear prisms top and bottom. Optional smooth opal (1 and 2 light only).


FINISH

White finish is standard. Optional in walnut.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

- EM** - Emergency
- DM** - Dimming
- 16D*** - Two lights down, one light up (For 3 lamps only)
- 16U*** - One light down, two lights up (For 3 lamps only)
- SW** - Turn Switch
- SW-1** - Two Circuit Units (downlighting on SW - uplight remotely switched)
- SW-4** - 4 Way Switch (up-down-both-off)
- NL** - Nite-Light
- NLS** - Nite-Light with Pin Switch
- CO** - Convenience Outlet
- TP** - Tamperproof Hardware
- OPAL** - Smooth Opal lens
- TBAF** - Top Baffle
- DIV** - Lamp Divider

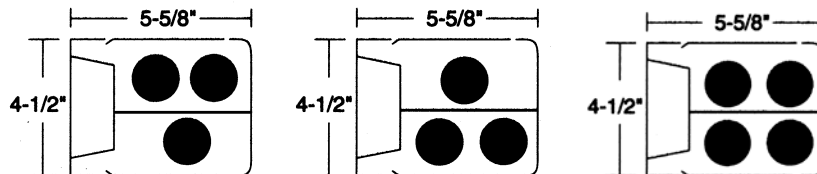

JOB NAME:
FIXTURE TYPE:
MODEL NO: