7. Task & Wall Brackets

Universal Edge Lit Exit Sign







Slim, easy to install unit utilizing highly efficient L.E.D. units provided with ultra bright diodes. Reliable and cost efficient unit is ideal for any commercial or industrial application where high performance and contemporary design is required. Available in single or double face for ceiling or wall mount. Includes canopy. 6" letters are standard. Test switch and indicator light located at end of unit. To meet various local codes, units are also available with optional green letters, 8" letters, or flashers, when required. Automatic low-voltage disconnect, brownout protection. Emergency models provided with solid state charging system and maintenance free lead calcium batteries.

HOUSING

Anodized extruded aluminum housing. Clear acrylic face is standard. Optional white or mirrored face available.

ELECTRICAL


25 year life expectancy and utilize only 3 watts. All units are universal voltage.

CERTIFICATION

All units bear UL label and Made in the U.S.A. label. Meets or exceed NEC, OSHA, NFPA, and most state and local codes.

New York City and Chicago approved units available.

DIMENSIONS

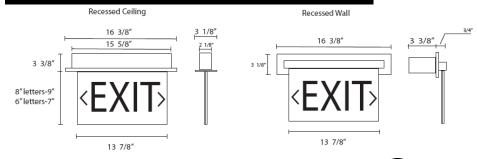



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

LISTED

ORDERING

TYPE MODEL FACE EDGU6-AC -6" Letters AC Only Single (Standard) Face PP-EDGU8-Battery 2 – 8" Letters Backup Double (NYC) Face







OPTIONS

SM – Surface Mount (Std)

RM - Recessed Mount

WM – Wall Mount

WH - White Face

MR - Mirror Face

GL - Green Letters



| JOB NAME: |
|---------------|
| FIXTURE TYPE: |
| MODEL NO: |