


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

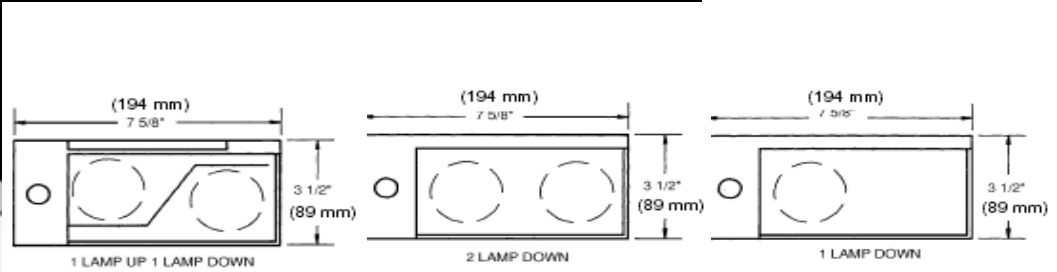

ORDERING

Available in standard 2', 3', and 4' lengths in 1 and 2 lamp configurations, T5, T8. Optional custom 1' units for CF lamps Versatile unit, can be wall mounted with or without up-light component for task lighting. Can be under cabinet or corner mounted. Optional switch, occupancy sensor, convenience outlet, GFI and cord and plug assembly to meet any requirements. Lens is held in place by spring latches for secure fit. For individual and continuous row mounting.

HOUSING

Heavy gauge die formed steel housing.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Clear Linear Prismatic in diffuser for glare free illumination. Optional up-light lens is ribbed acrylic.

FINISH

All housings post-painted with a smooth white polyester powder coat. Optional black or custom finish available.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY/TYPE</u>	<u>VOLTAGE</u>
IJW-2 (2' unit)	2-PLC18	120
	1-F17T8	277
	2-F17T8	UNV
IJW-3 (3' unit)	1-F25T8	
	2-F25T8	
	1-F21T8	
	2-F21T8	
IJW-4 (4' unit)	1-F32T8	
	2-F32T8	
	1-F28T5	
	2-F28T5	
	1-F24T5HO	
	2-F24T5HO	
	1-F54T5HO	
	2-F54T5HO	

Consult factory for custom 1' units

OPTIONS:

- EM** – Emergency battery pack
- DM** - Dimming (Specify)
- UP** – Up-light Component
- BLK** – Black Finish
- RSW** – Rocker Switch
- CO** – Convenience Outlet
- GFCI** – GFI Outlet
- CP6** – Cord & Plug (6' 120V Blade Standard)
- OC** – Occupancy Sensor



JOB NAME:
FIXTURE TYPE:
MODEL NO: