




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

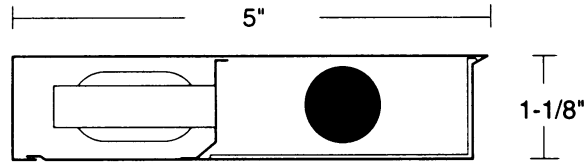

ORDERING

Available in 12", 21", 22", 24", 33", 34", 42", and 46" lengths. Ultra thin profile, specification grade under cabinet fixture. Offers efficient on-task illumination in areas obscured from overhead lighting. For individual or continuous row mounting. One piece unitized wireway contains all electrical components. Keyhole slots for ease of installation. Special 5/8" connector supplied to facilitate wiring. Optional rocker switch, convenience outlet and cord and plug to meet any mounting requirement.

HOUSING

Die formed heavy gauged steel. Housing and ends are one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Snap-in ribbed opal lens for soft pleasing light is standard. Optional task lighting lens with opaque front and ribbed bottom.

FINISH

Standard finish is baked white enamel. Optional finishes are oak, walnut, and chrome. Interior reflecting surfaces are baked white enamel with a minimum 89% reflectance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMPS</u>	<u>LENGTH</u>	<u>VOLTAGE</u>
LI	1-8T5	12-3/16"	120
	1-13T5	21-3/16"	277
	1-14T5	22-19/32"	
	2-8T5	24-7/16"	
	1-8T5/1-13T5	33-7/16"	
	1-21T5	34-7/16"	
	2-13T5	42-7/32"	
	1-28T5	46-7/32"	UNV
	1-24T5HO	22-19/32"	
	1-39T5HO	34-7/16"	
1-54T5HO	46-7/32"		

OPTIONS:

- RSW** – Rocker Switch
- CO** – Convenience Outlet
- CP6'** – 6' Cord and Plug wired in (120V)
- L** – Fixture with Lamps Installed
- OTL** – Opaque Task Light Lens
- REM** – Remote Emergency Battery



JOB NAME:
FIXTURE TYPE:
MODEL NO: