


DIMENSIONS

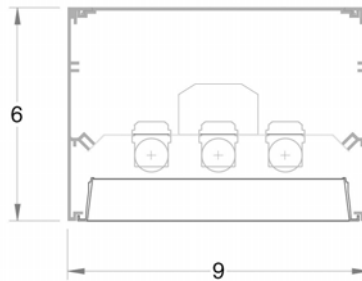

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

ORDERING

Available in 2', 3', 4', 6', and 8' lengths, in 1, 2 and 3 lamp configurations, T8 and T5. 9"x6" narrow design is architecturally preferred for installation in corridors, lobbies, and office areas. Direct down light is standard. Indirect and direct/indirect applications are available as options. Individual and continuous row for both surface and pendant mounting. Ends seams are fitted to provide the appearance of continuous smooth channel. Knockouts on channel ends allow for through wiring or end feed. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>VOLTAGE</u>
S69	1	2'	T8	120
	2	3'	T5	277
	3	4'	T5HO	UNV
	2	6'		
	4	8'		
	6			

HOUSING

Die formed welded heavy gauge cold rolled steel. Uplight fixtures are provided with (2) rows of 1/2" apertures along top of the housing which provide approximately 12% uplight.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Acrylic prismatic is standard. Optional white cross baffle, paracube, and parabolic semi-specular.

FINISH

All metal parts post painted with premium grade white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

OPTIONS:

- AL** – Acrylic Lens
- WCB** – White Cross Baffle
- PCB** – Parabolic Cross Baffle
- AC** – Aircraft Cable
- ST** – Stem Mount
- SM** – Surface Mount
- SA95** – High Efficiency Specular Reflector
- SA87** – Specular Reflector
- WH92** – High Efficiency White Reflector
- D/I** – Direct/Indirect



JOB NAME:
FIXTURE TYPE:
MODEL NO: