


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

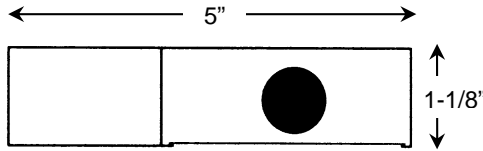

ORDERING

Available in 1 and 2 lamp configurations, T5, and T8. Solid front design for direct light on the task without glare from front lighting component. Thin profile for unobtrusive under cabinet mounting. Keyhole slots on housing for easy installation. Optional convenience outlet and switch to accommodate any requirements. Knockouts on ends and back of housing for surface conduit and continuous row mounting.

HOUSING

Die formed heavy gauge steel. Housing and ends are one continuous piece.

ELECTRICAL

Electronic, HPF ballasts comply with Federal Energy Efficiency standards.

SHIELDING

Snap-in clear ribbed .125 thick acrylic is standard.

FINISH

All metal parts are finished with premium grade white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL and Made in U.S.A. labels.

MODEL
TL

LAMPS

- 1-F8T5 (12" length)
- 1-F13T5 (21" length)
- 1-F15T8 (18" length)
- 1-F8T5/F13T5 (33" length)
- 2-F13T5 (42" length)
- 1-FO17T8 (24" length)
- 1-FO25T8 (36" length)
- 1-FO32T8 (48" length)
- 1-F14T5 (22-1/2" length)
- 1-F21T5 (34-1/2" length)
- 1-F28T5 (46-1/2" length)

VOLTAGE

- 120
- 277
- UNV

OPTIONS:

- DM** – Dimming
- CO** – Convenience Outlet
- RSW** – Rocker Switch
- REM** – Remote Emergency Battery Pack

JOB NAME:
FIXTURE TYPE:
MODEL NO:

