




**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

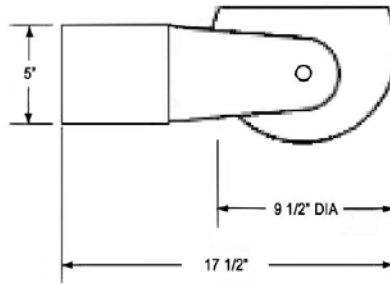

**ORDERING**

Three sizes to accommodate single lamp configuration. 35W to 1000W metal halide or dual metal halide lamps, 175W, 250W or 400W. Adjustable yoke mount for pillars, walls or any horizontal surfaces. Integral ballast for 35W-175W. Remote ballast for single 250W, 400W, dual 175W, 250W and 400W. Optional ballast box for 250W, 320W and 400W. 75% efficient forward throw reflector engineered for outstanding lighting performance. Optional cut-off visor where no external shielding is provided. Also available in energy efficient PL version. Hinge and latch door frame with stainless steel hardware for a positive moisture resistant fit.

**HOUSING**

Heavy gauge extruded aluminum housing.

**ELECTRICAL**

Remote mounted encased and potted thermally protected HPF with dual tap (120V and 277V). Optional ballast box for integral core and coil dual tap ballast.

**SHIELDING**

1/8" thick prismatic tempered, heat resistant glass fully gasketed in door frame.

**FINISH**

White polyurethane powder coat is standard. Optional black, metallic aluminum or custom finishes available.

**CERTIFICATION**

All units bear UL and Made in U.S.A. label. UL Listed for wet location.

MODEL	LAMP QTY	WATTAGE	SIZE	VOLTAGE
<b>W9007</b>	1	35 MH	14" x 9"	120
		70 MH	18" x 9"	277
		100 MH	24" x 9"	UNV
		150 MH		
		175 MH		
		250 MH		
		320 MH		
		400 MH		
1000 MH				
<b>W9007-CF</b> (Compact Fluorescent)	1	40BX	18" x 9"	
	2	50BX		

**OPTIONS**

- COV-** Cut off Visor
- ALUM-** Metallic Aluminum Finish
- QTZ-** Quartz Restrike
- CC-** Custom Color
- EM-** Emergency Battery



JOB NAME:
FIXTURE TYPE:
MODEL NO: