


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

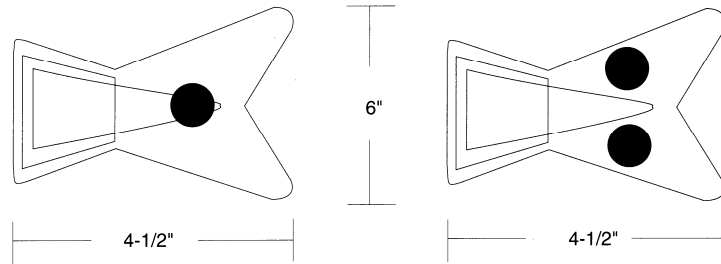

ORDERING

Available in 2', 3', and 4' lengths, in 1 and 2 lamp configurations, T8 and T5, T5HO. Versatile units that can be used as wall brackets, or, with optional lamp divider and switching, can also function as a hospital bed light. Unique "V" shaped front deflector shield conceals lamps and provides excellent direct/indirect lighting. Wood grain finish on shield provides a decorative touch. Optional white enamel finish is available. Custom colors can be special ordered. Die cast aluminum ends painted beige to blend with wood grain shield. Invisible knockouts on ends. For mounting individually or in continuous rows. Full complement of options to fill any wall requirement.

MODEL	LAMP QTY	LENGTH	TYPE	VOLTAGE
WD	1	24"	T8	120
	2	36"	T5	277
		48"	T5HO	UNV

HOUSING

Die formed heavy gauge steel housing with die formed cast aluminum ends for rigidity and structural stability.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All interior reflecting surfaces are finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

OPTIONS:

- EM – Emergency
- DM – Dimming
- WHT – All White Unit
- BLD – Lamp Divider
- SW4 – Way Switching (2 separate ballasts)
- SW1 – Circuit Wiring (2 separate ballasts – switch for downlight/uplight remote)
- SW – 1 Circuit Pull Switch
- NL – Night Light



JOB NAME:
FIXTURE TYPE:
MODEL NO: