


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

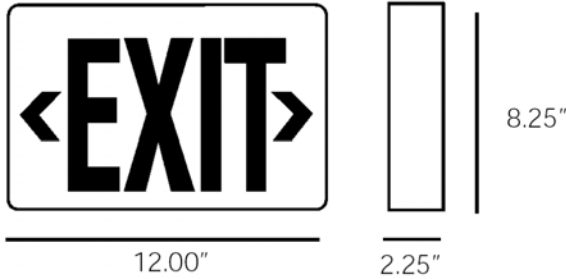

ORDERING

Slim, easy to install unit is a compact all-in-one snap together design. The light source will be red LED technology which provides a uniform illumination L.E.D. units provided with ultra bright L.E.D. diodes. Reliable and cost efficient unit is ideal for any commercial or industrial application where high performance and contemporary design is required. Universal mounting single or double face for ceiling end or back mount. Includes canopy and extra face. Standard white housing. Optional black housing To meet various local codes, units are also available with optional green letters. Knockouts provided for left, right, and double face arrows. Emergency models provided with solid state charging system and maintenance free batteries. Optional with remote capabilities.

MODEL
X6R

TYPE
LED

X6R-PP

LED with Ni-Cad Battery

HOUSING

Housing constructed of thermoplastic material. Optional steel and cast aluminum housings.

EMERGENCY MODELS

Supplied with replaceable, sealed Nickel-Cadmium battery. Provides a minimum of 90 minutes of continuous emergency illumination.

CERTIFICATION

All units bear UL label. Meets or exceed NEC, OSHA, NFPA, and most state and local codes. New York City and Chicago approved units available. Suitable for damp locations.

4" x 4" head



Shown with optional Emergency Heads (2H)

OPTIONS:

- CA – Cast Aluminum Housing
- ST – Steel Housing
- BLK: Black Housing
- Change X6R to X6G – Green Stencil Face
- Change X6R to X8R – 8" Letters (Steel or Cast Aluminum)
- REM: Remote Capabilities
- NYC: New York City Approved
- CHI: Chicago Approved
- 2H – Emergency Heads (Combo)
- RM-Running man



JOB NAME:

FIXTURE TYPE:

MODEL NO:

