




DIMENSIONS

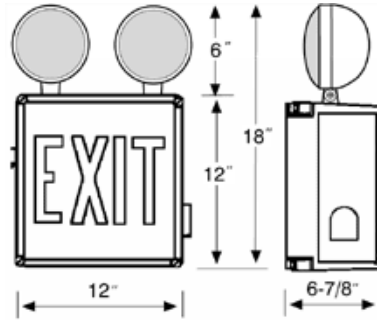

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

ORDERING

LED powered exit sign features an enclosure resistant to corrosive atmospheres, non hazardous dust environments, water spray or splashing water. Universal operation. Available in AC only or self powered. Removable directional chevrons. Optional 2 headed unit and unit with green letters. Self Powered Emergency models provided with solid state charging system and maintenance free batteries.

HOUSING

ABS, corrosion resistant UV stabilized enclosure.

ELECTRICAL

2.5 watt LED with life expectancy of 100,000 hours.

CERTIFICATION

All units bear UL label. Approved for wet location. Meets or exceed NFPA Life Safety 101, NEC, OSHA, and most state and local codes.

MODEL
X6R-WL
X6R- WL-PP

TYPE
LED

VOLTAGE
UNV

OPTIONS:

Change X6R to X6G – Green Letters
2H – Emergency Heads (Combo)

JOB NAME:
FIXTURE TYPE:
MODEL NO:

