


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

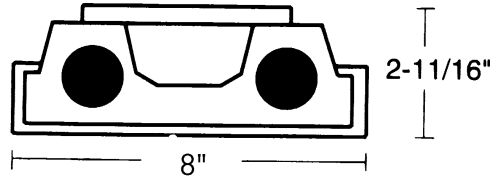

ORDERING

Available in 2' and 4' lengths in T8 and T5. Unique body design produces a slender and low profile appearance. Suitable for most standard and low density ceiling applications. 100% clear acrylic prismatic diffuser hinges from either side for ease of service. Flat bottom and linear ribbed sides provide excellent light control. Integral embossed white end plates with flush knockouts make fixtures for individual or continuous row mounting. For pendant or surface mounting.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
CAW	2	17T8 32T8 14T5 28T5	120 277 UNV

HOUSING

Die formed heavy gauge steel housing and ends unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All parts finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Suitable For damp location. Made in U.S.A. ARRA and BAA compliant.

OPTIONS:

- EM** - Emergency
- DM** - Dimming (Specify Type)



JOB NAME:
FIXTURE TYPE:
MODEL NO: