




**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

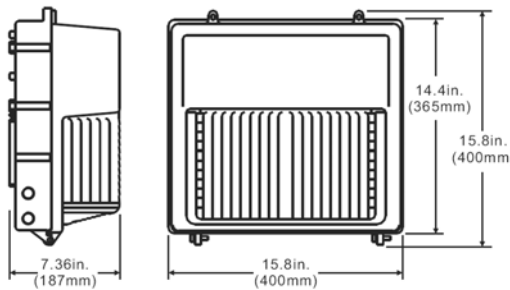

**ORDERING**

Die cast aluminum housing with integral hinging feature for ease of maintenance. Borosilicate prismatic glass optically designed for optimum light distribution. Textured anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. Threaded apertures for conduit and optional photocell. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit. Optional stainless steel wire guard. Optional tamperproof hardware.

**HOUSING**

Rugged die cast aluminum housing.

**ELECTRICAL**

For metal halide lamping ballast is high power factor, constant wattage auto transformer. Electrical components are mounted to cast aluminum housing for optimum heat dissipation. For high-pressure sodium, ballast is normal power factor reactor type for 120V. High power factor, multi-tap, and most fixed voltages available.

**SHIELDING**

Borosilicate glass is standard. Wire guard available.

**FINISH**

Baked on premium architectural bronze for maximum durability.

**CERTIFICATION**

All units bear UL label. Made in U.S.A.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
<b>RWB</b>	100	<b>PSMH-</b>	120
	150	Pulse Start	277
	250	Metal Halide	480
	400		<b>MULTI</b>
	100	<b>HPS-</b>	
	150	High	
	250	Pressure	
	400	Sodium	
	(1 or 2)-26	<b>CF-</b>	120
	(1 or 2)-32	Compact	277
	(1 or 2)-42	Fluorescent	<b>UNV</b>

**OPTIONS:**

- EM** - 90 Min. Remote Battery Back-Up (Compact Fluorescent Only)
- QZ** - Quartz Restrike
- PC** - Photocell (Specify Voltage)
- TP** - Tamperproof hardware
- GLR** - Fusing
- CC** - Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: