


4. Outdoor

Cast Aluminum Exterior Wall Bracket

WB



DIMENSIONS

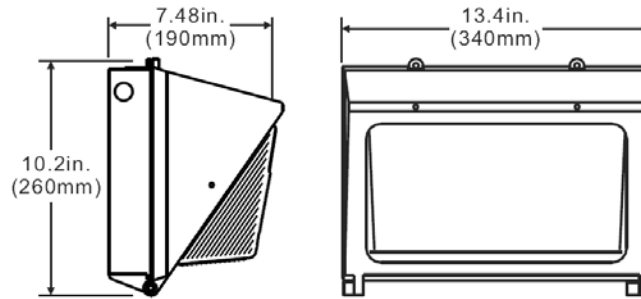

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Die cast aluminum housing with integral hinging feature for ease of maintenance. Borosilicate prismatic glass optically designed for optimum light distribution. Optional polycarbonate shield or wire guard for vandalproof protection is available. Textured anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. Threaded apertures for conduit and optional photocell provided for the flexibility during installation. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit. The fixture's compact size is ideal for lamping up to 175w metal halide.

HOUSING

Rugged die cast aluminum housing.

ELECTRICAL

For Fluorescent: Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

For HID: Ballast is pre-wired, CWA HPF, core and coil with dry film capacitor and starter (if required).

SHIELDING

Borosilicate glass is standard.

FINISH

Baked on premium architectural bronze for maximum durability is standard.

CERTIFICATION

All units bear UL label. UL listed for wet and damp locations. Made in U.S.A. ARRA compliant.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
WB	70	PSMH-Pulse	120
	100	Start Metal	277
	150	Halide	480
			MULTI
	50	HPS-High	
	70	Pressure	
	100	Sodium	
	150		
	1-26	CF-Compact	120
	2-26	Fluorescent	277
	1-32		UNV
	2-32		
	1-42		
	2-42		
	40	IND -	UNV
		Induction	

OPTIONS:

EM - 90 Min. Remote Battery Back-Up (Compact Fluorescent Only)

PC - Photocell

VS - Vandal Shield

TP - Tamperproof hardware

GLR - Fusing

QZ - Quartz Restrike

WG - Wire Guard

CC - Custom Color



JOB NAME:

FIXTURE TYPE:

MODEL NO: