


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

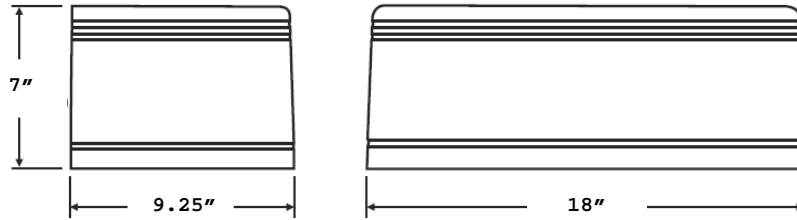

ORDERING

Ideal for parking areas, entrances, walkways, underpasses, loading docks, recreation areas, and tunnels. Heavy-duty die-cast aluminum construction. Heat and impact resistant tempered glass lenses. Powder coated finish on cast aluminum housing. One piece designed anodized aluminum reflector for optimum light efficiency. Silicon rubber seal prevents leakage. Available as downlight only or up and downlight. Lamping up to 150W PSMH, 150W HPS and compact fluorescent up to 42W available.

HOUSING

Heavy-duty die cast aluminum housing.

ELECTRICAL

Optimized for 150W MH and 150W HPS. Standard with 120V, 277V, or Multi-tap ballast. High Power Factor and other voltages/lamp options are also available.

FINISH

Powder coated architectural bronze is standard. Customer colors are available upon request.

CERTIFICATION

All units bear UL label. Listed for wet location. Made in U.S.A.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
CWPC	70	PSMH-	120
	100	Pulse Start	277
	150	Metal Halide	480
	100	HPS-	MULTI
	150	High Pressure Sodium	
	70	IND-	
		Induction	
	(1 or 2) 26	CF- Compact	120
	(1 or 2) 32	Fluorescent	277
	(1 or 2) 42		UNV

OPTIONS:

- EM** – 90 Minute Remote Battery Back-Up (For Compact Fluorescent Only)
- D/I** – Direct/Indirect Lighting
- PC** – Photocell
- VS** – Vandal Shield
- TP** – Tamperproof hardware
- GLR** – Fusing
- QZ** – Quartz Restrike
- CC** – Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: