


DIMENSIONS

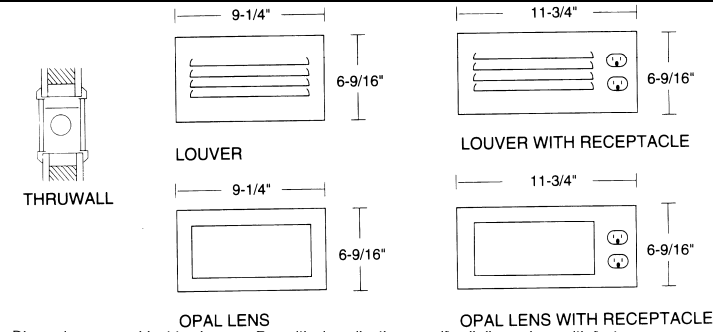

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

ORDERING

Available in incandescent (up to 40W) and energy efficient PL lamps (up to 13W) and NEW 10 watt LED light source. Perfect for applications where highly efficient low levels of direct illumination are desirable. Wide variety of front panels available. Optional thru-wall unit to give supplementary lighting on both sides of a wall utilizing only one fixture. Optional hospital grade equipment available. Tamperproof and Vandalproof units available. Ample knockouts for simple installation. Gasketed for dust, moisture, and insect resistance. For wall or ceiling mounting.

HOUSING

20 gauge steel for rigidity. Also available in aluminum and stainless steel.

FACE PLATE

20 gauge steel open face is standard. Optional open face aluminum; louvered face in steel, aluminum or stainless steel.

ELECTRICAL

Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.

LENS

Frosted glass is standard for open face units, Polycarbonate and Faux Alabaster lens optional. Opal acrylic is standard for louvered face units.

FINISH

Baked white enamel faceplate is standard. Natural aluminum finish is optional on aluminum units.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>
STLT	1	PL9 40A PL13	120V 277V UNV

OPTIONS:

- EM** – Emergency
- DM** – Dimming
- SS** – Stainless Steel Housing
- AH** – Aluminum Housing
- TW** – Thru-Wall Applications (wall thickness)
- ALF** – Aluminum Front
- LV** – Stainless Steel Mounting Brackets
- SSF** – Stainless Steel Front
- LEX** – Polycarbonate Lens
- CO** – Receptacle on Face
- HGCO**– Hospital Grade Receptacle
- DL** – Damp Location Label
- RSW** – Rocker Switch on Face

JOB NAME:
FIXTURE TYPE:
MODEL NO:

