


DIMENSIONS



DLC PENDING

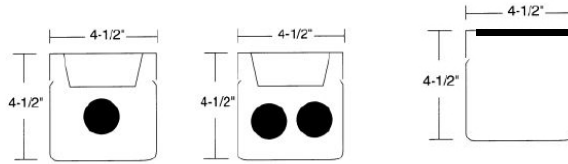

NOW AVAILABLE IN LED!

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in 2', 3', and 4' lengths in 1 and 2 lamp configurations in T8, T5, T5HO, or for LED light tubes. This fixture can be configured in numerous energy saving configurations to provide motion/sound activated, daylight harvesting, and emergency lighting for stairwells. Versatile fixture can be mounted individually, or in continuous rows (with optional joiner bands). Wall or ceiling, vertical or horizontal mounting. Optional switch and/or convenience outlet for wall mount or auxiliary applications. Tamperproof hardware available for added security.

HOUSING

Heavy gauge die formed steel housing and ends.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise. LED tube provided by RLE or others. Available in warm, neutral, cool and ultra-cool colors.

SHIELDING

Extruded clear diffuser with prismatic bottom and linear ribbed sides. Optional smooth opal diffuser available.

FINISH

Reflector wire cover finished in premium grade white enamel. Housing also available in bright anodized aluminum.

CERTIFICATION

All fluorescent units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

Standard 5 year warranty when equipped with RLE supplied light tubes

MODEL	LAMP QTY	WATTAGE	VOLTAGE
15	1	17T8	120
	2	25T8	277
		32T8	UNV
	1	15T5	
	2	21T5	
		28T5	
	1	24T5HO	
		39T5HO	
		54T5HO	
	1	LED-2' 9W	
	2	LED-4' 18W	

15LED 24" V2-4.7 FLATBOARD ARRAY 4000 LUMENS

15LED 48" V2-4.7 FLATBOARD ARRAY 4400 LUMENS

OPTIONS:

- EM - Emergency
- DM - Dimming (Specify Type)
- BA - Bright Anodized Aluminum Finish
- TP - Tamperproof Hardware
- TSD - Tamperproof Screwdriver
- OPAL - Smooth Opal lens
- SW - Pull Chain Switch
- CO - Convenience Outlet
- JB - Joiner Bands
- NL13 - PL13 Night Light
- OC - Occupancy Sensor (Bottom Mount)
- OC505 - WattStopper □ FS-505 Occupancy Sensor
- COLOR TEMP. - Specify Warm, Neutral, Cool, or Ultra-cool
- 1EM - One fluorescent lamp with EM only, one LED tube
- 1BAL/EM - One fluorescent lamp with ballast and EM pack, one LED tube
- 1BAL - One fluorescent lamp with ballast, one LED tube

15-OC505



JOB NAME:
FIXTURE TYPE:
MODEL NO:

