


8. LED

Horizontal Wall Pack LED

HWPLED

DIMENSIONS

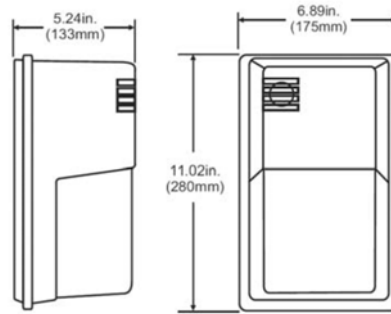

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Die cast aluminum base plate with conduit access. Corrosion resistant housing. One piece anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. Threaded apertures for conduit and optional photocell. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit. Optional tamperproof hardware is available. A 10W LED is comparable to 50W HID.

HOUSING

High impact polycarbonate housing.

ELECTRICAL

Highest quality driver, emitters and power supply for long life.

LED COLOR

Standard in 5000K. Consult factory for other Kelvin temperatures.

FINISH

Baked on premium architectural bronze for maximum durability.

CERTIFICATION

Suitable for wet location. Made in USA. ARRA compliant. UL listed. 3 year warranty.

MODEL
HWPLED


WATTAGE
10

VOLTAGE
UNV (120/277)

OPTIONS:

PC – Photocell (specify voltage)

TP – Tamperproof Hardware

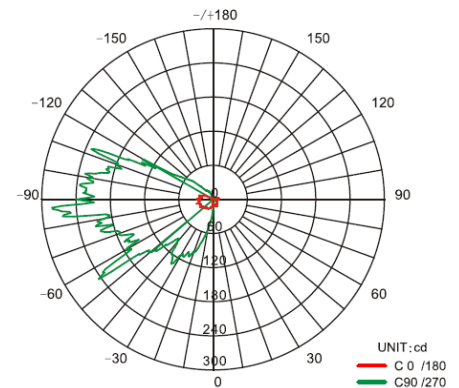

Average Beam Angle(50%): 88.6°



JOB NAME:
FIXTURE TYPE:
MODEL NO: