




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

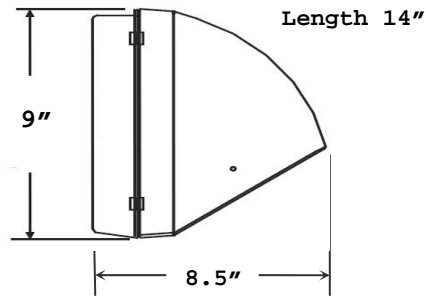

Available in 24 and 36 watt. LED technology offers an unprecedented lamp life. This fixture is virtually maintenance-free. A 24W LED is comparable to 70-100W HID. A 36W LED is comparable to 125-150W HID.

HOUSING

Heavy aluminum alloy housing provides durability and maximum heat sinking for longer life of electronic components.

ELECTRICAL

High efficiency electronic constant current Class II 120/277V driver.

LED COLOR

Standard in 5000K. Consult factory for other Kelvin temperatures.

FINISH

Exterior housing is finished in architectural bronze as standard. Custom colors available.

CERTIFICATION

Suitable for wet location. Made in USA. ARRA and BAA compliant. UL listed. 3 year warranty.

ORDERING

<u>MODEL</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>
CWPLED	24	UNV (120/277)
	36	

OPTIONS

- EM** - Emergency
- PC** - Photocell (specify voltage)
- TP** - Tamperproof Hardware
- CC** - Custom Color (specify color)



JOB NAME:
FIXTURE TYPE:
MODEL NO: