



**DIMENSIONS**

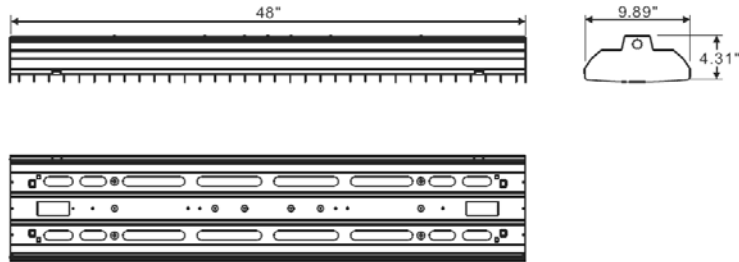

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

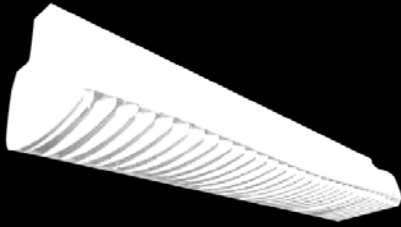

**ORDERING**

Decorative fluorescent high bay to suit most commercial, classroom, and residential applications. Integral embossed white end plates with flush knockouts make fixtures suitable for individual or continuous row mounting. White blade diffuser hinges for ease of service and provides wide spread light distribution. For pendant mounting on stem, cable, or chain. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

**HOUSING**

Die formed heavy gauge steel with riveted steel end plates for additional strength.

**ELECTRICAL**

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

**SHIELDING**

Steel cross blade painted white is standard. For other finishes please consult factory.

**FINISH**

All parts finished with high gloss powder coat enamel over iron phosphate pretreatment for maximum adhesion and rust resistance.

**CERTIFICATION**

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
<b>7834</b>	3	32T8	<b>AC</b> – Aircraft	120
	4	28T5	Cable (48" Standard)	277
		54T5HO	<b>ST</b> – Stem (24" Standard)	UNV
		32T8-8TD	<b>SM</b> – Surface Mount (No Hardware Supplied)	
		28T5-8TD		
		54T5HO-8TD		

**OPTIONS:**

- EM** – Emergency
- DM** – Dimming
- CC** – Custom Color
- SA95** – High Efficiency Specular Reflector
- SA87** – Specular Reflector
- WH92** – High Efficiency White Reflector



JOB NAME:
FIXTURE TYPE:
MODEL NO: