



DIMENSIONS



7810 Series

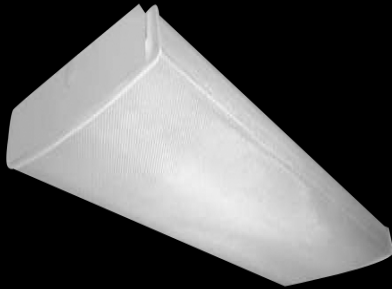

7815 Series

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Specification grade glow end wrap around is ideal for corridor, office space, supermarket and conference room applications. 10" wide unit is available in a two-lamp configuration, T8 and T5. 15" wide unit is available in 4 lamp configurations, T8 and T5. .125 thick clear acrylic prismatic bottom section, in conjunction with linear side prisms and injection molded "glow" ends control glare and increase visual comfort. Integral embossed white end plates with flush knockouts make fixtures suitable for individual or continuous row mounting. Diffuser hinges from either side for ease of maintenance. For surface or pendant mounting. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel with leveling embossments, which allow direct mounting on most combustible low-density ceilings.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

.125 thick, P12 acrylic prismatic diffuser is standard.

FINISH

All parts finished with high gloss baked white powder coat with 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
7810- 10" wide unit	2	17T8	120
	2	32T8	277
	2	14T5	UNV
	2	28T5	
7815- 15" wide unit	4	17T8	
	4	32T8	
	4	14T5	
	4	28T5	

OPTIONS:

- EM** – Emergency
- DM** – Dimming (Specify Type)
- SA95** – High Efficiency Specular Reflector
- SA87** – Specular Reflector
- WH92** – High Efficiency White Reflector



JOB NAME:
FIXTURE TYPE:
MODEL NO: